

# CSEU2, CSEU4

## Commercial Adjustable Head Unit

### FEATURES

- Emergency unit for commercial applications
- High impact, 5VA flame rated, UV stabilized, white thermoplastic housing
- Fully adjustable, glare free incandescent lamp heads
- Prismatic acrylic lens with 6 volt, 5.4 watt incandescent lamps
- Remote capacity with CSEU4 model
- Maintenance-free lead-calcium battery with fully automatic solid state charger
- Temperature range: 0°C to 40°C (32°F to 104°F)
- UL 924 Damp Location Listed



CSEU2

EMERGENCY LIGHTING

### ORDERING INFORMATION





#### MODEL

CSEU2

CSEU4 Additional remote capacity two 5.4W heads



CSEU4

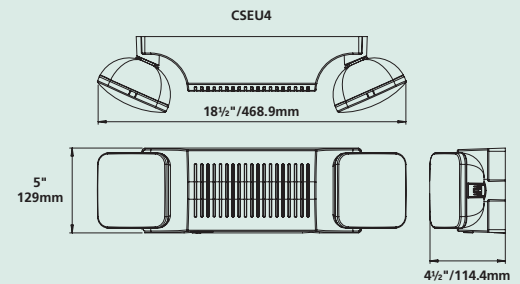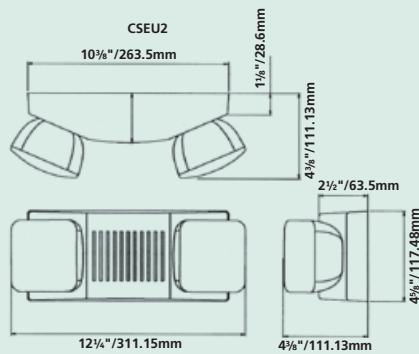

# CSWEU2

## Wet Location Emergency Unit

### FEATURES

- Injection molded, flame retardant thermoplastic housing
- Gasketed Polycarbonate Cover
- 2 each 6V, 7 watt MR-16 Halogen Lamps
- External Push to Test switch and LED-On Indicator
- Maintenance-free lead-calcium battery with fully automatic solid state charger
- Temperature range: 10°C to 40°C (50°F to 104°F)
- UL 924 Wet Location Listed



NEW

### ORDERING INFORMATION

CSWEU2

#### MODEL

CSWEU2

